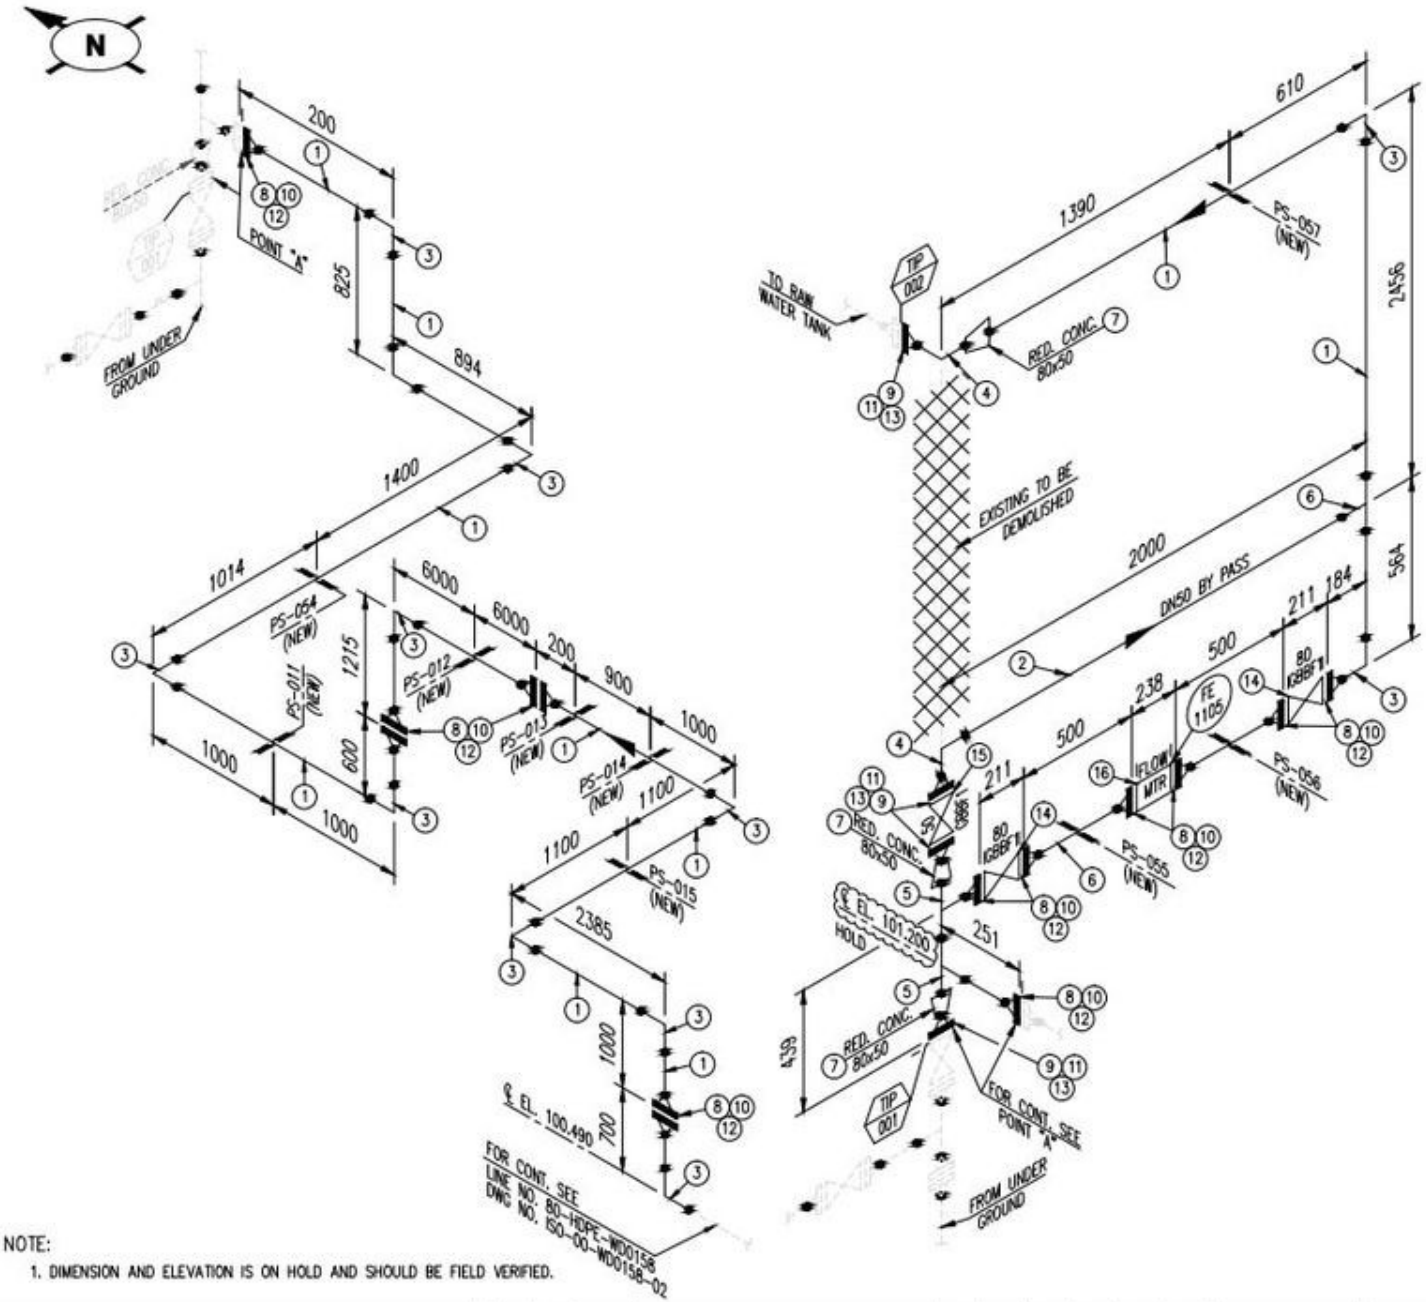

NOTE:

1. DIMENSION AND ELEVATION IS ON HOLD AND SHOULD BE FIELD VERIFIED.

ITEM NO.	COMPONENT DESCRIPTION	MATERIAL	QTY. LENGTH
1	PIPE DN 80 BE SMLS CS, SCH 40	A 106-B	34500
2	PIPE DN 50 BE SMLS CS, SCH 80	A 106-B	2000
3	ELBOW DN 80, 90D LR BW SMLS CS, SCH 40	A 234-WPB	12
4	ELBOW DN 50, 90D LR BW SMLS CS, SCH 80	A 234-WPB	2
5	TEE EQ. DN 80 x 80, BW SMLS CS, SCH 40	A 234-WPB	2
6	TEE RED. DN 80 x 50, BW SMLS CS, SCH 40 x 80	A 234-WPB	1
7	RED CONC. DN 80 x 50, BW SMLS CS, SCH 40 x 80	A 234-WPB	3
8	FLANGE DN 80 WN 150# RF CS, SCH 40	A 105	14
9	FLANGE DN 50 WN 150# RF CS, SCH 80	A 105	4
10	GASKET DN 80 4.5mm Thk. SPWD 150# WINDING (FLEXIBLE GRAPHITE FILLER) NO INNER RING CS CENT. RING Dim TO ASME B16.20	SS 316L	10
11	GASKET DN 50 4.5mm Thk. SPWD 150# WINDING (FLEXIBLE GRAPHITE FILLER) NO INNER RING CS CENT. RING Dim TO ASME B16.20	SS 316L	4
12	STUD BOLT W/2 HH NUTS, 5/8" x 90mm LG.	A-193-B7 A-194-2H	40
13	STUD BOLT W/2 HH NUTS, 5/8" x 80mm LG.	A-193-B7 A-194-2H	16
14	GATE VALVE DN 80, 150# RF (TAG#: GBBF1)	CS	2
15	GATE VALVE DN 50, 150# RF (TAG#: GBBF1)	CS	1
16	FLOW METER DN 80, 150# RF (TAG#:FE-1105) BY VENDOR	-	1

PAINT SYSTEM -	-		
SERVICE COLOUR/BAND -	-/-		
INSULATION	PURPOSE	THK. (MM)	
	N	-	
	DESIGN	OPERATING	
LINE PRESSURE (kPag)	-	-	
LINE TEMPERATURE (°C)	-	-	
LINE TEST PRESSURE (kPag)	-		
LINE TEST MEDIUM	-	NDT GROUP NO.	-
TEST PACK	-	PWHT	-

NOTES:

- ALL DIMENSIONS ARE IN MILLIMETRES.
- ALL COORDINATES AND ELEVATIONS ARE IN METRES.
- AFTER SHOP FABRICATION ALL FLANGES AND OPEN ENDS TO BE COMPLETELY COVERED AND SEALED.
- CONTRACTOR SHALL FIELD VERIFY ALL THE DIMENSIONS AND PIPE ROUTING PRIOR TO START THE FABRICATION WORK.

LEGEND: SOCKET WELD, SCREWED, FIELD WELD, BUT WELD, PIPE SUPP, INSULATION

REVISIONS

REV	BY	DATE	DESCRIPTION	CKD	DESIGN	ENG APPR	PROJ APPR	CLIENT APPR	OWNER APPR	REFERENCE DRAWING

SCALE	CAD No.	JOB No.	DRAWING No.	SHEET	REV.
NTS	-	-	ISO-00	1 OF 6	-

PROJECT

TITLE PIPING ISOMETRIC
LINE NO. -
-

A3